

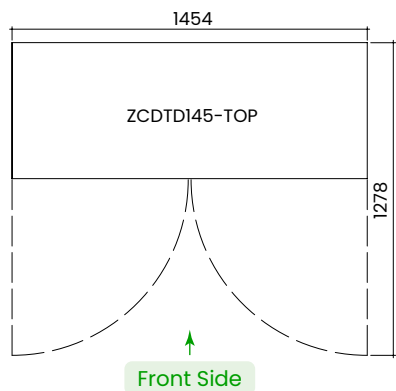


COMBINED FREEZER

ZCDTDI45-TOP



The ZCDTD Series are designed to maximise frozen storage capacity while reducing floor footprint, making them ideal for supermarkets, convenience stores, and specialty retailers. With dual-zone operation, these units feature a top freezer with sliding self-closing doors and a spacious bottom freezer equipped with baskets for efficient stock organisation. The illuminated canopy provides built-in space for eye-level branding or product advertising, helping boost sales directly at the point of purchase.

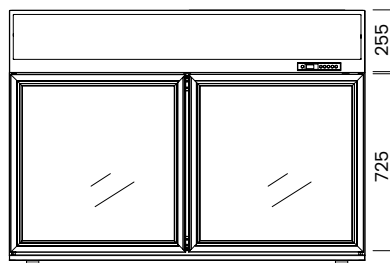

FEATURES AND FUNCTIONS

Cooling System	Fan forced cooling
Energy Consumption	15.73 kWh/24h
Exterior & Interior of the Cabinet	Exterior Body White, Painted steel Interior Body White, Painted aluminum
Ergonomic Design	3 layer double tempered heated glass Self-evaporation, Digital controller, LED Lights, Automatic closing hinged door
Durable Door Profile	Silver colour, Aluminum With with Integrated door frame handle
Shelves/Baskets	4 Shelves Capacity 25kg per shelf Reinforced wire
Blowing Agent	60mm, Cyclopentane
Ventilation (mm)	Top/Rear: ≥100 mm Sides: No requirement

TECHNICAL DESCRIPTION

Power Cord	10Amp plug and lead
Power Cord Length	2.6m (2m outside cabinet)
Power Supply	240V/50Hz, 650W
Rated Current	4.7A
Compressor Cooling Capacity(W)	624
LED Lights	Top canopy, 2×7W LED strip Upper inner liner, 2×5W LED strip

WARRANTY

2 Years Parts and Labour + 2 Years Parts Only for Products Registered within 14 Days of Invoice



PHYSICAL QUALITIES

Width (mm)	1450
Depth (mm)	558
Height (mm)	1022
Packing Width (mm)	1540
Packing Depth (mm)	660
Packing Height (mm)	1155
Net Weight (Kg)	139
Gross Capacity (L)	257
Net Capacity (L)	232
Display Area (m²)	0.54

PERFORMANCE SPECIFICATIONS

Ambient temp/RH	25°C 60%
Climate Class	3
Temperature Range	-22°C to -18°C
Rated kWh/year	5066.2
Refrigerant	R290 (80g)
Energy Efficiency Index (EEI %)	88.22
Star Rating / GEMS Rating	2 (3L1)

SAFETY & STANDARDS: GEMS Certificate; IEC/IECEE CB Scheme; IOS;



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.